


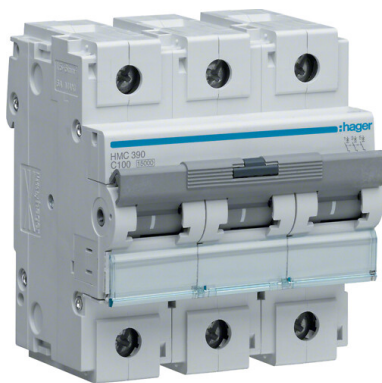

HMC390

Kaitselüliti 3P 15kA C-100A, 4,5mod.

Bränd: Hager

GTIN: 3250613230203

Kaitselüliti 3P 15kA C-100A, 4,5mod.

ETIM-teave:

Sisesehitussügavus	70 mm
Vabasti tunnusjoon	C
Pooluste arv (kokku)	3
Kaitstud pooluste arv	3
Tunnusvool	100 A
Tunnuspinge	415 V
Isolatsiooni nimipinge Ui	500 V
Tunnus-impulssstaluvuspinge Uimp	6 kV
Lühisvoolu tunnuslahutusvõime Icn standardi EN 60898 järgi pingel 230 V	15 kA
Pinge liik	AC
Lühisvoolu tunnuslahutusvõime Icn standardi EN 60898 järgi pingel 400 V	15 kA
Lühisvoolu tunnuslahutusvõime Icu standardi EN 60947-2 järgi pingel 230 V	15 kA
Rated short-circuit breaking capacity Icu according to IEC 60947-2 at 400 V	15 kA
Frequency	50 Hz - 60 Hz
Current limiting class	3
Flush-mounted installation	Jah
Concurrently switching neutral conductor	No
Over voltage category	3
Pollution degree	3
Additional equipment possible	Yes
Width in number of modular spacings	4.5
Degree of protection (IP)	IP20
Ambient temperature during operating	-25 °C - 70 °C
Connectable conductor cross section multi-wired	1 mm² - 50 mm²
Connectable conductor cross section solid-core	1 mm² - 70 mm²
Explosion-proof	No

Kinnitused / märgistused:

