



REALOBJECTS

PDFReactor®

A problem has occurred


2026-06-01 17:29:50

Error message:

This license has expired on 2026-05-30.

License Information:

License serial no:	3916
Licensee:	Adeona Oy
Product:	PDFReactor Web Service
Version:	12.0
License Type:	CPU
Amount:	12 Thread(s)
Maintenance Exp. Date:	2026-05-30
Expiration Date:	2026-05-30
Purchase Date:	2015-11-18
Conditions:	[This license is for use on development systems only. It may not be used on staging or productive systems of any kind.]
Sign Date:	2025-06-02 15:12

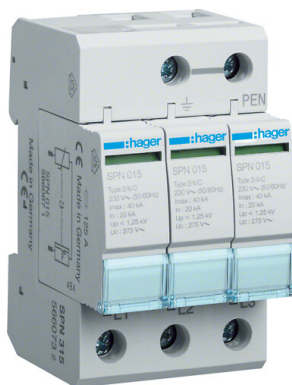

SPN315

Overspenningsvern type 2, 3-p 400V TNC, Uc 275V, Up ≤ 1,5kV, In 20kA, Iimp 40kA**Merke:** Hager**GTIN:** 3250615660732**Elnummer:** 1659306

Produktnorm EN 61643-11. Overspenningsvern SPN315 for 230V TT og 400V TN-C lavspenningsanlegg. Overspenningsvern type 2 - mellomvern (type 2 = klasse C vern). Primært for 400V TN-C-S nett. Største forankoblede sikring, 125A. Nominell driftsspennning fase-fase 400V AC. Tennspenning U_c 275V AC. Avledningsevne I_n (8/20 us) 15 kA. Avledningsevne I_{max} (8/20 μs) 40 kA. Avledningsspennning $U_p \leq 1,5$ kV. Nett-system TN. Varistoravleder. Brukes som første overspenningsvern i inntaket/ leveringspunktet, eller nedstrøms som mellomvern etter et type 1+2 kombiavleder overspenningsvern (kombinert grovvern type 1 + mellomvern type 2). Dekningsområde - 15 - meter, 15 meter på hver side av vernet. Vern kan leveres med signalkontakt og har utskiftbare patroner. Defekt vern vises ved rødt meldeflagg på patron. Disse vernene har utskiftbare patroner. Dette vernet er i stand til å avlede støtstrømmer med bølgeform 8/20 us på 15 kA flere ganger. Overspenningsvernet har termisk beskyttelse mot skadelig oppvarming pga konstant avlederstrøm til jord ved feil på vern.

ETIM data:

Netttype andre	Ja
Nominell utladning støtstrøm (8/20)	20 kA
Maks. Avlederstøtstrøm (8/20)	40 kA
Merkespenning AC	400 V
Maks kontinuerlig spenning AC	275 V
Maks. PV spenning	0 V
Sikkerhetsnivå	1.25 kV
Sikkerhetsnivå L-N	1.5 kV
Monteringsmetode	DIN-skinne, 35 mm
Med fjernkontakt	Nei
Signalisering ved enheten	Optisk
Testklasse type 2	Ja
Beskyttelsesklasse IP	IP20

Godkjenninger:



REALOBJECTS PDFReactor®

Evaluation Version

This PDF document was created by an evaluation version of RealObjects PDFReactor 12.3.2 (17644). The evaluation version is fully functional, but includes this information page. It must not be used for production purposes. The information page and all other evaluation notices must not be removed from the PDF file.

NOTE: Conversions in evaluation mode might be slower and the results might have a larger file size than in production mode.

Buy PDFReactor

To buy a PDFReactor license follow this link:

[Buy PDFReactor online](#)

About PDFReactor

RealObjects PDFReactor is a powerful formatting processor for converting HTML and XML documents into PDF. It uses Cascading Style Sheets (CSS) to define page layout and styles. The server-side tool enables a great variety of applications in the fields of ERP, eCommerce and Electronic Publishing.

PDFReactor supports HTML5, CSS3 and JavaScript.

It allows you to dynamically generate PDF documents such as invoices, delivery notes and shipping documents on-the-fly. PDFReactor allows you to easily add server-based PDF generation functionality to your application or service. Since PDFReactor runs on a server, the end-user in general does not need any software other than a PDF viewer.

For more information visit www.pdfreactor.com